

Pool Heat Pump - Gulfstream HE-150 (HE150-R-A)

Submitted (substitute)	Gulfstream HE150-R-A
As specified	Aquacal SuperQuiet SQ225, 143k BTU COP 6.5 (DISCONTINUED)
Capacity / COP	142,000 BTU, COP 6.2
Electrical	208-230 V, 1-phase; scroll, R410A
Plumbing / flow	2 in union; 30-70 GPM
Alternate	Pentair UltraTemp 140
Qty	1 per pool
Status	SUB

Substitution - engineer confirmation required

R2: Aquacal SQ225 is discontinued. Gulfstream HE-150 (Pentair-owned) proposed - comparable performance (142,000 vs 143,000 BTU; COP 6.2 vs 6.5), keeping the pump room in one Pentair warranty/parts channel. Alternate: Pentair UltraTemp 140.

Heat Pump Gulfstream Specs 2021.xlsx


Detailed Specification Sheet

Model Number	HE150-R-A	G&F Part Number	HE150-R-A	Trade/Brand Name	GulfStream
COP 80/80/80	6.2/142,000	COP 80/63/80	5.4/124,000	COP 50/63/80	4.0/85,000
Minimum Circuit Ampacity	40	Main Time Delay Breaker	50	Average Running Amps	28
Voltage	208-230	Phase	1	Hertz	60
Plumbing Size	2" Union	Min/Max Flow Rate	30-70	Recommended Flow	45
Fan Motor	1/3 HP	Fan Load Amperage	1.8	Fan Speed RPM	825
Compressor Type	Scroll	Compressor RLA	30	Compressor LRA	145
Refrigerant	R410A	Refrigerant/Factory Charge	4.8 lbs	Design Pressure Hi/Low	600/150
Unit Weight	248 lbs	Shipping Weight	276lbs		
Unit Dimensions	31"x31"x46"	Foot Print	31"x31"	Shipping Dimensions	32"x31"x50"
AHRI Testing Certification	3694125	ETL Testing Certification	0	CSL Testing Certification	0


Picture of Model



Unions Detail

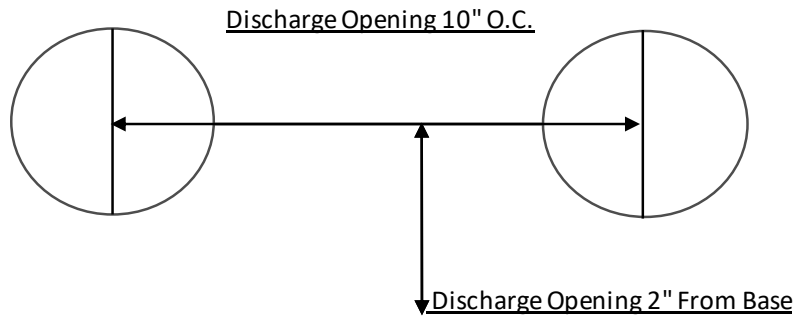

Head Loss

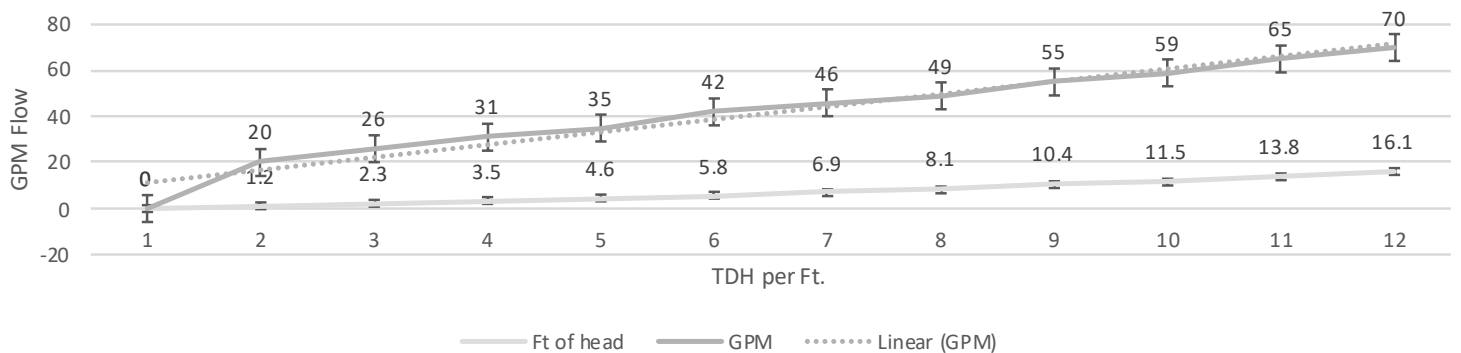

Date: 27 August 2026
Remarks: No objection
Reviewed: BSD